

**Available on GEM**



**High Refresh Rate**



**Huge Viewing Angle**




**Modular Design**



**Low Heat**

# Indoor Video Wall

- AdvanceTech™ Matrix LCD Video Wall System is the ultra-narrow bezel LCD video wall family that provides outstanding tiled visual performance, supports 24x7 operation and requires minimal installation space.
- Pixel Pitch based Module Setup- P1.8 , P2.5 , P4.8 - customized size
- Video wall controller with Wireless, Wired connectivity with Content management software for easy upgradation-

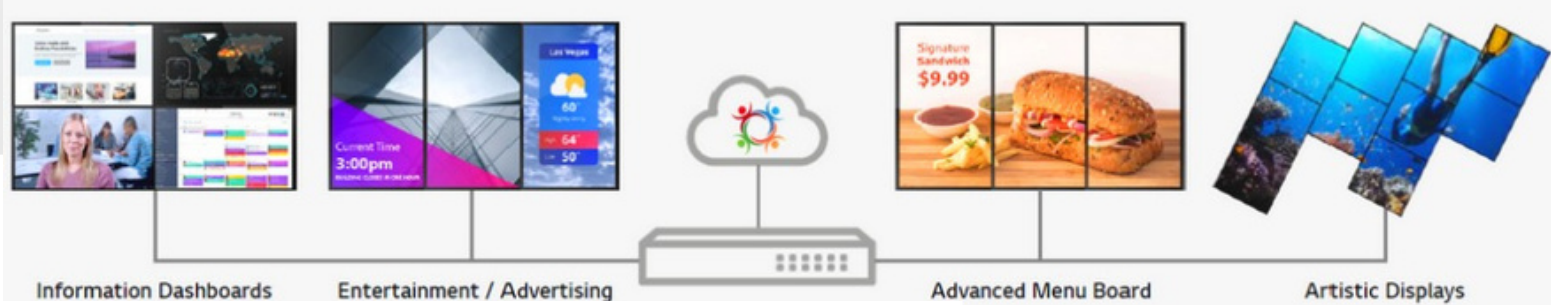

## **INDOOR LED DISPLAY VIDEO WALL**

Technical Specification	Indoor LED Display	
Model	ADR-P2.5	ADR-P4
LED Type	SMD2121	SMD1921
Pixel Pitch	2.5mm	4mm
Module Resolution (W×H)	128X64=8192 Pixels	80X40=3200 Pixels
Module Dimension	320mm×160mm×16.6mm	320mm×160mm×18mm
Module Weight	0.46±0.02kg	0.49±0.02kg
Single-dot Brightness Calibration	Support	Support
White Balance Brightness	≥600 CD/m <sup>2</sup>	≥5000 CD/m <sup>2</sup>
Standard Color Temperature	6500K (1000K~9500K Adjustable )	6500K ( 1000K~9500K Adjustable )
Beam Angle (Hor/Ver°)	140°/140°	140°/120°
Contrast Ratio	3000 : 1	3000 : 1
Aspect ratio	16:9	16:9
Input Power	488W/m <sup>2</sup>	879W/m <sup>2</sup>
Input Power	163W/m <sup>2</sup>	293W/m <sup>2</sup>
Power Voltage	AC90~132V/ AC186~264V, Frequency 47-63 (Hz)	AC90~132V/ AC186~264V Frequency 47-63 (Hz)
Frame Changing Frequency	≥60Hz	≥60Hz
Drive Mode	Constant Current Drive / 32 Scan	Constant Current Drive / 10 Scan
Refresh Rate	≥1920Hz	≥1920Hz
Processing Depth	12~14 Bit	12~14 Bit
Video Support	2K HD, 4K UHD	2K HD, 4K UHD
Life Typical Value (HRS)	100000H	50000H
Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%-65%RH (No Condensation)	-20°C~50°C / 10%-65%RH
Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%-60%RH (No Condensation)	-10°C~30°C / 10%-60%RH