


# ARDUINO MEGA 2560

## INTRODUCTIONS

The Arduino Mega 2560 is a microcontroller board based on the ATmega2560. It has 54 digital input/output pins (of which 15 can be used as PWM outputs), 16 analog inputs, 4 UARTs (hardware serial ports), a 16 MHz crystal oscillator, a USB connection, a power jack, an ICSP header, and a reset button. It contains everything needed to support the microcontroller; simply connect it to a computer with a USB cable or power it with a AC-to-DC adapter or battery to get started.

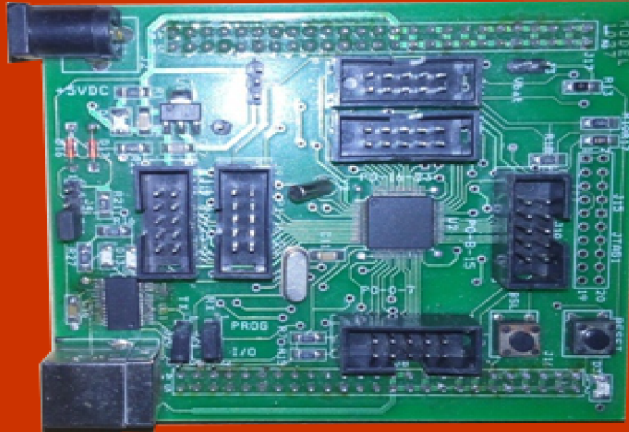

## SPECIFICATION

Microcontroller	Atmega2560
Operating Voltage	5V
Digital I/O Pins	54 (of which 15 provide PWM output)
Analog Input Pins	16
DC Current per I/O Pin	40 mA
DC Current for 3.3V Pin	50 mA
Flash Memory	256 KB of which 8 KB used by bootloader
SRAM	8KB
EEPROM	4 KB
Clock Speed	16 MHz



All The Technology You need

ISO 9001:2008  
Certified Company



All the Technology You Need

ADVANCE TECH INDIA PVT. LTD

Website: [www.atechindia.com](http://www.atechindia.com). E-mail: [atechindia@gmail.com](mailto:atechindia@gmail.com)