



Indoor Video Wall P1.8



Indoor P1.839 Series

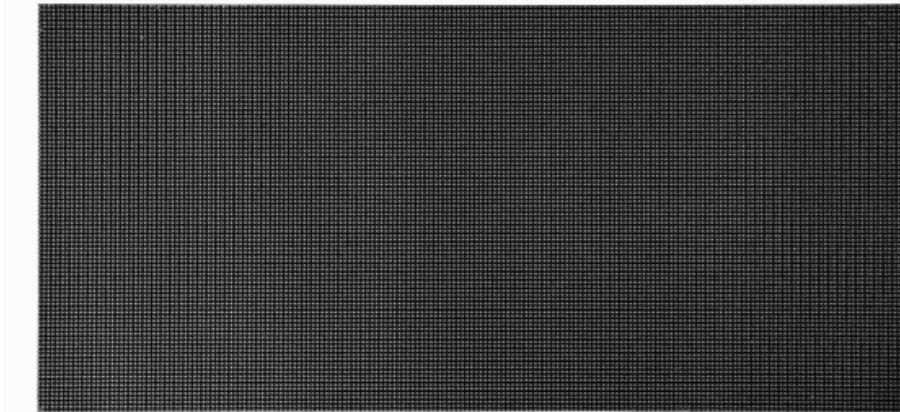


Hole Position of Indoor P1.839 Series

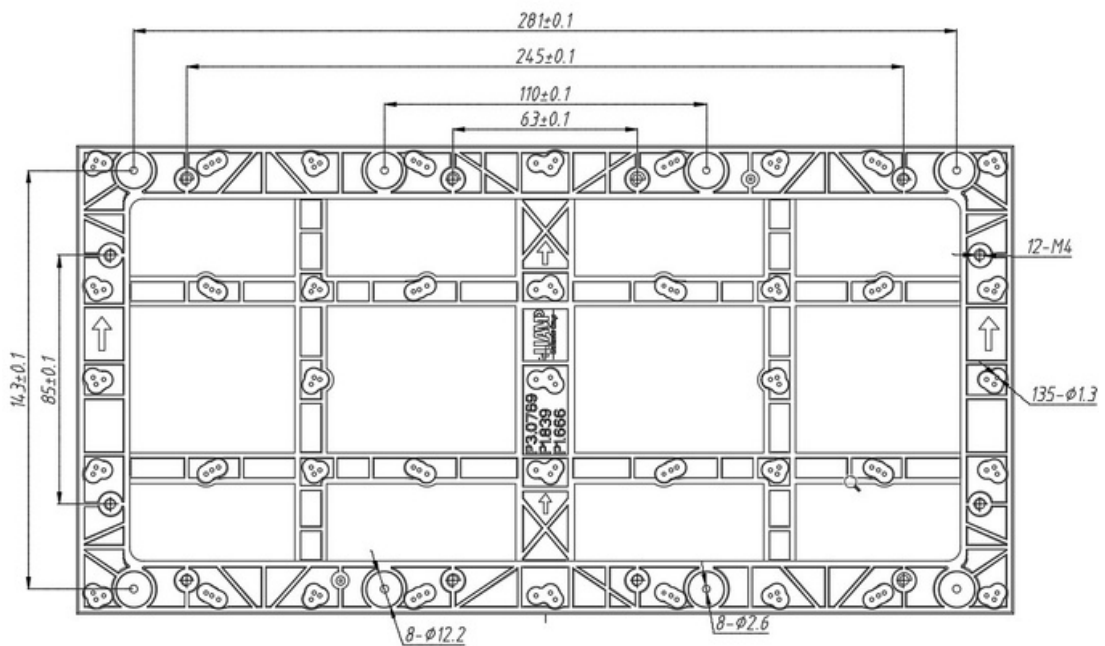


Specification

	Parameter Name	Product Parameter
Module	LED Type	SMD1212
	Pixel Pitch	1.839mm
	Module Resolution (W×H)	174×87=15138 Pixels
	HUB	HUB320
	Module Dimension	320mm×160mm×16.6mm
	Module Weight	0.42±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	≥500 CD/m ²
	Standard Color Temperature	6500K (1000K~9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000 : 1
Electronic	Input Power <Max>	488W/m ²
	Input Power <Typical>	163W/m ²
	Power Voltage	AC90~132V/ AC186~264V, Frequency 47~63 (Hz)
Performance	Frame Changing Frequency	≥60Hz
	Drive Mode	Constant Current Drive / 58 Scan
	Refresh Rate	≥3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
Environment	Life Typical Value (HRS)	50000H
	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%~65%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%~60%RH (No Condensation)


Indoor Video Wall P1.5

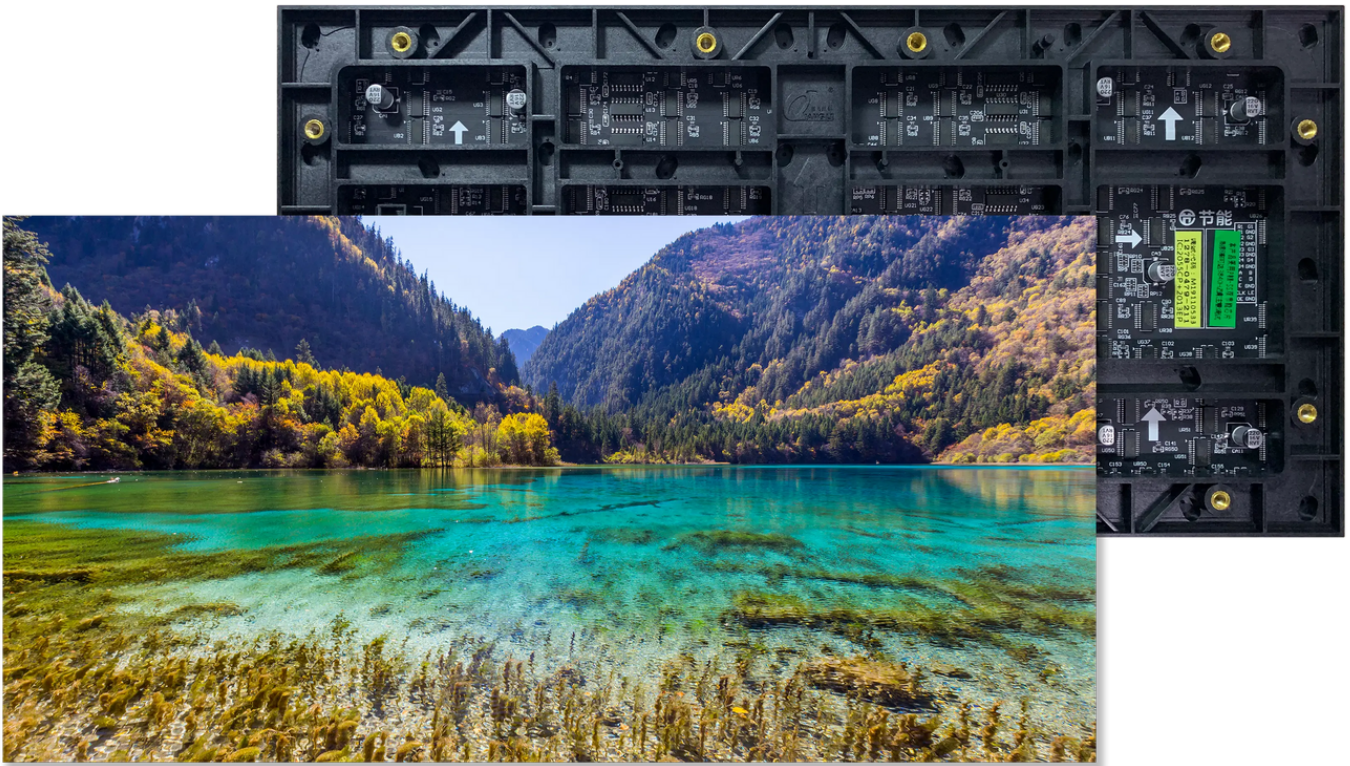

Indoor P1.538 Series

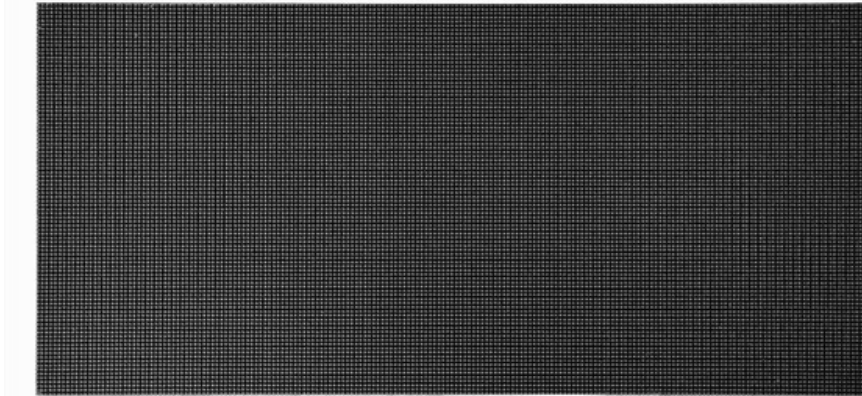

Hole Position of Indoor P1.538 Series

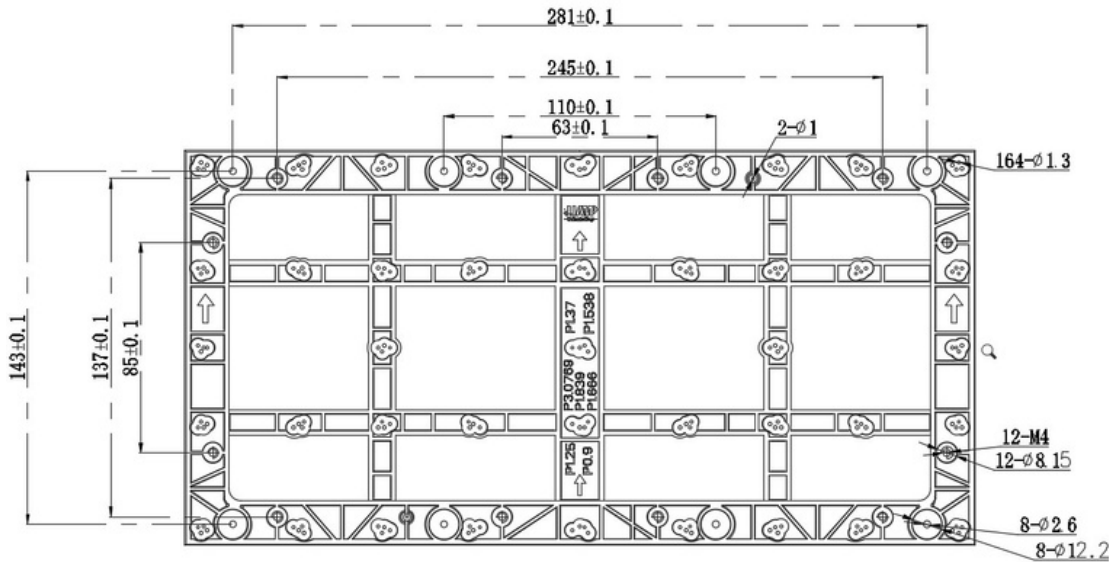

Specification

	Parameter Name	Product Parameter
Module	LED Type	SMD1212
	Pixel Pitch	1.538mm
	Module Resolution (W×H)	208*104=21632 Pixels
	HUB	HUB320
	Module Dimension	320mm×160mm×16.6mm
	Module Weight	0.49±0.02kg
Optical	Single-dot Brightness Calibration	Support
	White Balance Brightness	≥500 CD/m2
	Standard Color Temperature	6500K (1000K~9500K Adjustable)
	Beam Angle (Hor/Ver°)	140°/140°
	Contrast Ratio	3000 : 1
Electronic	Input Power <Max>	488W/m2
	Input Power <Typical>	163W/m2
	Power Voltage	AC90~132V/ AC186~264V, Frequency 47-63 (Hz)
Performance	Frame Changing Frequency	≥60Hz
	Drive Mode	Constant Current Drive / 52 Scan
	Refresh Rate	≥3840Hz
	Processing Depth	12~14 Bit
	Video Support	2K HD, 4K UHD
	Life Typical Value (HRS)	50000H
Environment	Working Temperature/ Humidity Range (°C/RH)	-20°C~50°C / 10%~65%RH (No Condensation)
	Storage Temperature / Humidity Range (°C/RH)	-10°C~30°C / 10%~60%RH (No Condensation)